




Multiple alarms



Hydrocarbon refrigerant
and foam material LBA



High performance in
temperature uniformity



Intelligent frequency
conversion technology

TwinCool Frequency Conversion ULT

The Twincool Frequency conversion range of freezers utilize two key innovations to delivery outstanding sample security and energy efficiency – dual cooling and adaptive refrigeration technologies.



Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint




Haier Biomedical
International



Haier Biomedical
International

Product Advantages

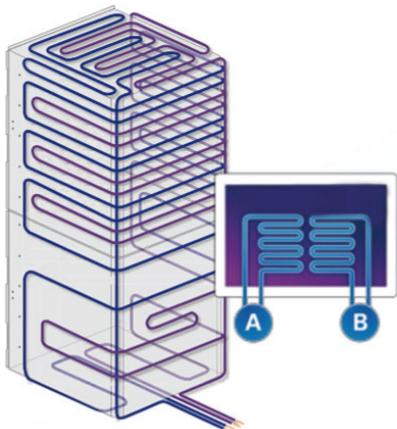

Dual refrigeration system, double safety and optimal reliability

Double independent hydrocarbon refrigeration system design, each system can maintain -80°C ensuring the safety of stored samples

Environmental Protection

Environmentally friendly hydrocarbon refrigerant and foam material LBA

World-leading Energy Saving Refrigeration Technology

Intelligent frequency conversion technology and HC refrigeration system delivers a 50% reduction in energy usage when compared to traditional HFC refrigeration systems

Optional IoT System

The optional IoT monitors the operating status of the equipment in real time. Equipped with multiple alarm functions and a self-diagnostics system to identify and warn users to ensure sample safety

Ergonomic Design

Adjustable Sample Loading Tray (Optional)

The adjustable height sample load tray provides users with a convenient place to hold samples while opening and accessing storage compartments

Large Loading Capacity

Maximum Capacity: 600 boxes
(2 inch boxes with 10*10 configuration) 60,000 samples can be stored

Intelligent Control

10.1-inch high-performance touch screen, sensitive touch operation. Users can check the real-time operating status via IoT

Low Noise Design

Optimised systems and noise-reducing cabinet design lower noise out to 42dB for a quieter working experience

Product Parts ◀


Ergonomic design

Document holder for easy storage of documents



High quality door opening experience

The ergonomic chamfer design of the handle ensures smooth operation and maximum durability

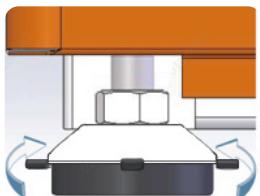


Adjustable feet

For easy positioning and levelling



Magnetic filter screen

Filter screen is easy to clean

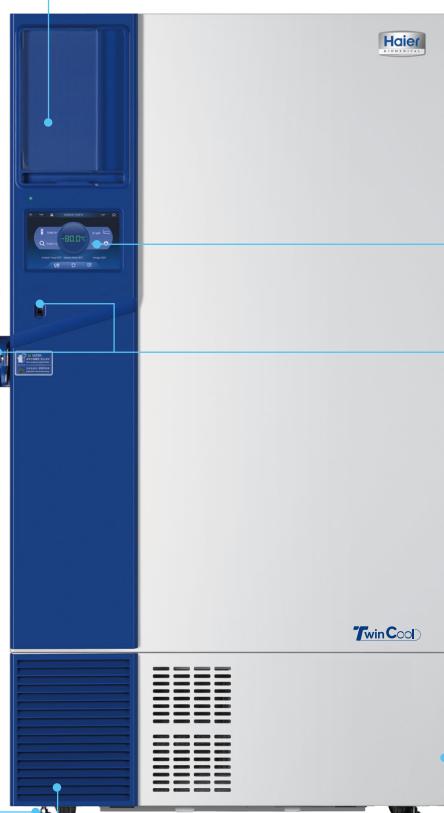

DW-86L828BPST

Microcomputer control

Microcontroller with 10.1 inch LCD touch screen displays temperature and other important data. Temperature display precision is 0,1°C

Multiple alarms

Including high/ low temperature alarm, sensor error alarm, hot condenser alarm, power failure alarm, low battery alarm, door ajar alarm, high ambient temperature alarm, etc



Multiple safety lock

Standard mechanical lock, optional electromagnetic lock
Optional fingerprint lock and NFC for optimal security and access



Networking function

Equipped with RS485 interface to connect multiple freezers

Specifications ◀

	Model	DW-86L828BPST	DW-86L728BPST	DW-86L578BPST
Technical Data	Cabinet Type	Upright	Upright	Upright
	Climate Class	N	N	N
	Cooling Type	Direct cooling	Direct cooling	Direct cooling
	Defrost Mode	Manual	Manual	Manual
	Refrigerant	HC	HC	HC
	Sound Level (dB(A))	42	42	42
Performance	Cooling Performance (°C)	-86	-86	-86
	Temperature Range (°C)	-40~-86	-40~-86	-40~-86
Control	Controller	Microprocessor	Microprocessor	Microprocessor
	Display	LCD	LCD	LCD
Electrical Data	Power Supply (V/Hz)	100~230/50/60Hz	100~230/50/60Hz	100~230/50/60Hz
	Electrical Current (A)	13	10.4	10.4
Dimensions	Capacity (L/Cu.Ft)	828/29.2	728/25.7	578/20.4
	Net/Gross Weight	kg	380/410	350/385
		lbs	837.7/914.9	771.6/848.8
	Interior Dimension (W*D*H)	mm	870*716*1310	766*716*1310
		in	34.3*28.2*51.6	30.2*28.2*51.6
	Exterior Dimension (W*D*H)	mm	1145*998*1980	1046*998*1980
		in	45.1*39.3*78.0	41.2*39.3*78.0
	Packing Dimension (W*D*H)	mm	1240*1080*2130	1120*1090*2130
		in	48.8*42.5*83.9	44.1*42.9*83.9
	Cabinet Width (without handle and hinge)	mm	1050	946
	Container Load (20'/40'/40'H)	8/20/20	10/20/20	12/24/24
Functions	High/Low Temperature	Y	Y	Y
	Hot Condenser	Y	Y	Y
	Power Failure	Y	Y	Y
	High/Low Voltage	Y	Y	Y
	Sensor Error	Y	Y	Y
	Low Battery	Y	Y	Y
	High Ambient Temperature	Y	Y	Y
	Door Ajar	Y	Y	Y
	Start-up Delay	Y	Y	Y
	Caster	Y	Y	Y
Accessories	Foot	Y	Y	Y
	Porthole	Y/2	Y/2	Y/2
	Shelves/ Inner Doors	3/4	3/4	3/4
	USB Interface	Y	Y	Y
	Remote Alarm	Y	Y	Y
	5V Power Supply Port	Y	Y	Y
	Temperature Chart Recorder	Optional	Optional	Optional
	RS232/485 Port	NA/Standard	NA/Standard	NA/Standard
	CO ₂ Backup System	Optional	Optional	Optional
	LN ₂ Backup System	Optional	Optional	Optional
Certifications	CE	Y	Y	Y
	UL	Y	Y	Y

*Haier Biomedical reserves the right to change products and specifications without prior notice.